

6MM HEXX™ HEX FOC™




- 6MM reduced-diameter ultra-lightweight high-strength carbon
- Pre-installed 6MM (H) nocks
- MicroLite™ 6MM (H) B-32 inserts
- Straightness: ± .001



6MM AFTERMATH™



- 6MM reduced-diameter high-strength carbon
- Pre-installed 6MM (H) nocks
- 6MM (H) ST RPS B-32 inserts
- Straightness: ±.005"

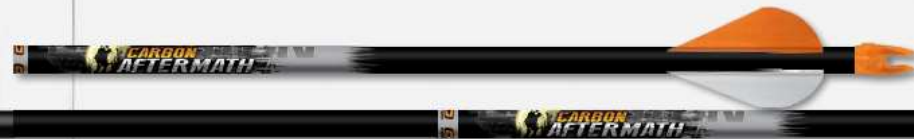


INCLUDED



6MM (H) MICROLITE™ B-32 Insert
(9 grains)

6MM (H) Nock™
(9 grains)

SOLD SEPARATELY

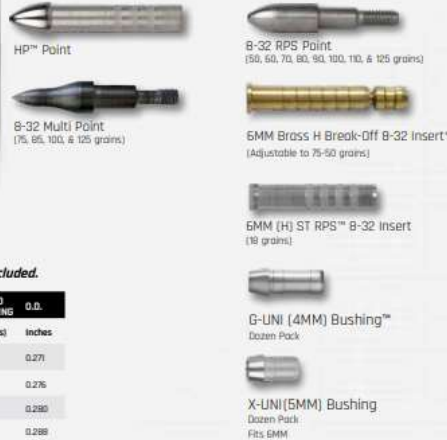

HP™ Point

B-32 RPS Point
(50, 60, 70, 80, 90, 100, 110, & 125 grains)

B-32 Multi Point
(75, 85, 100, & 125 grains)

6MM Brass H Break-Off B-32 Insert*
(Adjustable to 75-90 grains)

6MM (H) ST RPS™ B-32 Insert
(18 grains)

G-UNI (4MM) Bushing™
Dozen Pack

X-UNI (6MM) Bushing
Dozen Pack
Fits 6MM

*Hexx F.O.C. comes in sizes: 260, 330, and 400 with brass inserts included.

SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	RPS POINT	BROADHEAD ADAPTER RING	O.D.
	OPI	Deflection in Inches	Inches	O.D. Inches	Size (5 grains)	Inches
480	6.3	0.480	29.5	9/32	BAR6	0.271
400	7.2	0.400	31	9/32	BAR6	0.276
330	7.9	0.300	31.5	9/32	BAR6	0.280
260	9.1	0.260	32	9/32	BAR 7	0.288

INCLUDED



6MM (H) ST RPS™ B-32 Insert
(18 grains)

6MM (H) Nock™
(9 grains)

SOLD SEPARATELY



B-32 Multi Point
(85, 100, & 125 grains)

B-32 RPS Point
(50, 60, 70, 80, 90, 100, 110, & 125 grains)

CB POINT
(80/180 grains)

SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	RPS POINT	BROADHEAD ADAPTER RING	O.D.
	OPI	Deflection in Inches	Inches	O.D. Inches	Size (5 grains)	Inches
600	6.4	0.600	30.75	9/32	BAR6	0.259
500	7.3	0.500	30.75	9/32	BAR6	0.276
400	8.8	0.400	31.25	9/32	BAR7	0.283
340	9.6	0.340	31.75	9/32	BAR7	0.287
300	10.2	0.300	32.25	9/32	BAR7	0.291

